

# PORTERPARTS




## TYRE CATALOGUE

Supplying the New Zealand Industry for over 40 years



# PORTERPARTS

# HILO TYRE

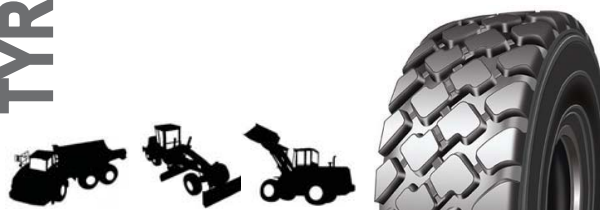

## B01N

Size	Star Rating	Load Index	TRA Code	Tread Depth (mm)	Type (TT/TL)	Standard Rim	Overall Dimension		Max. Load Pressure (kg/kPa)		Standard Pressure (bar)
							Diameter	Section Width	10km/h	50km/h	
17.5R25	★★★	182/167	L-3 / E-3	28	TL	14.00/1.5	1348	445	8500/575	5450/430	6.5/5.25
20.5R25	★★★	193/177	L-3 / E-3	31	TL	17.00/2.0	1492	520	11500/575	7300/450	6.5/5.25
23.5R25	★★★	201/185	L-3 / E-3	34	TL	19.50/2.5	1617	597	14500/650	9250/525	6.5/5.25
26.5R25	★★★	209/193	L-3 / E-3	37	TL	22.00/3.0	1750	673	18500/575	11500/450	6.5/5.25

Excellent traction and stability. Delivers exceptional operator comfort. Designed for loaders, earthmovers and equipment used in construction stockpile and truck loading applications



## B02N

Size	Star Rating	Load Index	TRA Code	Tread Depth (mm)	Type (TT/TL)	Standard Rim	Overall Dimension		Max. Load (kg)	Standard Pressure (bar)	Max. Speed (km/h)
							Diameter	Section Width			
23.5R25	★★★	201/185	L-3 / E-3	34	TL	19.50/2.5	1617	597	14500/9250	6.5/5.25	10/50
26.5R25	★★★	209/193	L-3 / E-3	37	TL	22.00/3.5	1750	673	18500/11500	6.5/5.25	10/50
29.5R25	★★★	216/200	L-3 / E-3	43.5	TL	25.00/3.5	1873	750	22400/14000	6.5/5.25	10/50
29.5R29	★★★	218/202	L-3 / E-3	43.5	TL	25.00/3.5	1975	750	23600/15000	6.5/5.25	10/50

With wide and stable tread. Excellent traction and adhesion. Designed to deliver exceptional operator comfort. Suited for Loaders & Articulated Dump trucks



## B02S

Size	Star Rating	Load Index	TRA Code	Tread Depth (mm)	Type (TT/TL)	Standard Rim	Overall Dimension		Max. Load (kg)	Standard Pressure (bar)	Max. Speed (km/h)
							Diameter	Section Width			
600/65R25	★★★	187/178	L-3	35.5	TL	19.50/2.5	1415	606	9750/7500	4.75/4.25	10/50
650/65R25	★★★	193/180	L-3 / E-3	38.5	TL	19.50/2.5	1480	640	11500/7300	4.75/4.25	10/50
750/65R25	★★★	202/190	L-3 / E-3	44.5	TL	24.00/3.0	1599	738	15000/10600	4.75/4.25	10/50
850/65R25	★★★	207/196	L-3 / E-3	48.5	TL	27.00/3.5	1740	852	17500/12500	4.75/4.25	10/50
870/65R25	★★★	214/203	L-3 / E-3	52.5	TL	28.00/3.5	1881	883	21200/15500	4.75/4.25	10/50
16.00R25	★★★	177B	E-4	46	TL	11.25/2.0	1532	445	730	7	50

With wide and stable tread. Excellent traction and adhesion. Designed to deliver exceptional operator comfort. Suited for Loaders & Articulated Dump trucks



## B03S

Size	Star Rating	Load Index	TRA Code	Tread Depth (mm)	Type (TT/TL)	Standard Rim	Overall Dimension		Max. Load (kg)	Standard Pressure (bar)	Max. Speed (km/h)
							Diameter	Section Width			
14.00R24	★★★★	168	E-4	38	TT	10.0	1418	383	6050	8	50
14.00R25	★★★★	168	E-4	38	TL	10.00/1.5	1418	383	6050	8	50
18.00R25	★★★	185	E-4	47	TL	13.00/2.5	1673	498	9250	7	50

Excellent resistance to damage. Long tyre life. Good ground grasping and traction in harsh conditions. Suitable for Dump trucks

# B04S



Size	Star Rating	Load Index	TRA Code	Tread Depth (mm)	Type (TT/TL)	Standard Rim	Overall Dimension		Max. Load (kg)	Standard Pressure (bar)	Max. Speed (km/h)
							Diameter	Section Width			
18.00R33	★★★	191	E-4T	54	TL	13.00/2.5	1887	498	10900	7	50
21.00R35	★★★	201	E-4T	61	TL	15.00/3.0	2052	572	14500	7	50
24.00R35	★★★	209	E-4T	68	TL	17.00/3.5	2175	653	18500	7	50

Reduced wheel spin in bad conditions, Good traction, special abrasion resistance, Excellent resistance to damage, Suitable for dump trucks



# B06S

Size	Star Rating	Load Index	TRA Code	Tread Depth (mm)	Type (TT/TL)	Standard Rim	Overall Dimension		Max. Load (kg)	Standard Pressure (bar)	Max. Speed (km/h)
							Diameter	Section Width			
18.00R25	★★★	185	E-4P	47	TL	13.00/2.5	1673	498	9250	7	50
18.00R33	★★★	191	E-4P	49	TL	13.00/2.5	1877	498	10900	7	50
21.00R33	★★★	200	E-4P	54	TL	15.00/3.0	2000	570	14000	7	50


Pattern designed for trucks, Provides excellent protection at high speed. Long tyre life in harsh conditions. Excellent resistance to damage. Suitable for many working conditions.



# BWYN

Size	Star Rating	Load Index	TRA Code	Tread Depth (mm)	Type (TT/TL)	Standard Rim	Overall Dimension		Max. Load (kg)	Standard Pressure (bar)	Max. Speed (km/h)
							Diameter	Section Width			
15.5R25	★★★	176/160	L-2 / E-2	25	TL	12.00/1.3	1277	394	7100/4500	6.5/5.25	10/50
17.5R25	★★★	182/167	L-2 / E-2	28	TL	14.00/1.5	1348	445	8500/5450	6.5/5.25	10/50
20.5R25	★★★	193/177	L-2 / E-2	31	TL	17.00/2.0	1490	521	11500/7300	6.5/5.25	10/50
23.5R25	★★★	201/185	L-2 / E-2	34	TL	19.50/2.5	1617	597	14500/9250	6.5/5.25	10/50
26.5R25	★★★	209/193	L-2 / E-2	37	TL	22.00/3.0	1750	673	18500/11500	6.5/5.25	10/50
29.5R25	★★★	216/200	L-2 / E-2	43.5	TL	25.00/3.5	1873	750	22400/14000	6.5/5.25	10/50
16.00R25	★★★★	179	L-2 / E-2	28	TL	11.25/2.0	1493	432	6700	10	70

Special abrasion resistance and good traction. All season use. Designed for use in ice and snow

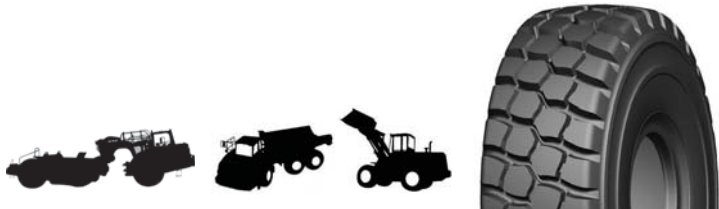

# BDTS

Size	Star Rating	Load Index	TRA Code	Tread Depth (mm)	Type (TT/TL)	Standard Rim	Overall Dimension		Max. Load (kg)	Standard Pressure (bar)	Max. Speed (km/h)
							Diameter	Section Width			
23.5R25	★★★	185	E-4	48	TL	19.50/2.5	1673	597	9250	5.25	50
26.5R25	★★★	193	E-4	52	TL	22.00/3.0	1798	673	11500	5.25	50
29.5R25	★★★	200	E-4	57	TL	25.00/3.5	1921	750	14000	5.25	50
29.5R29	★★★	202	E-4	57	TL	25.00/3.5	2023	750	15000	5.25	50

Good traction. Operator comfort. Heat resistance for high speed and cut resistance. Good penetration resistance. Suitable for many working conditions.



## B05N

Size	Star Rating	Load Index	TRA Code	Tread Depth (mm)	Type (TT/TL)	Standard Rim	Overall Dimension		Max. Load (kg)	Standard Pressure (bar)	Max. Speed (km/h)
							Diameter	Section Width			
14.00R24 (385/95R24)	★★★★	170	E-2	23	TT	10.00W	1356	382	6000	10	70
14.00R25 (385/95R25)	★★★★	170	E-2	23	TL	10.00/1.5	1356	382	6000	10	70
16.00R25 (445/95R25)	★★★★	174	E-2	23	TL	11.25/2.0	1493	432	6700	10	80
17.00R25 (445/95R25)	★★★★	170	E-2	23	TL	14.00/1.5	1348	445	6000	10	70
20.5R25 (525/80R25)	★★★★	179	E-2	23	TL	17.00/2.0	1490	521	7750	10	70
18.00R25 (505/95R25)	★★★★	186	E-2	23	TL	13.00/2.5	1615	4980	9500	10	70

High speed capability, Exceptional operator comfort, Intermediate transverse block pattern, long tyre life, Good traction, Suitable for Cranes.



## MWS/MWS+

Size	Star Rating	Load Index	TRA Code	Tread Depth (mm)	Type (TT/TL)	Standard Rim	Overall Dimension		Max. Load (kg)	Standard Pressure (bar)	Max. Speed (km/h)
							Diameter	Section Width			
17.5R25	★★★	182	L-5	68	TL	14.00/1.5	1399	445	8500	6.5	10
20.5R25	★★★	193	L-5	78	TL	17.00/2.0	1548	521	11500	6.5	10
23.5R25	★★★	201	L-5 / L-4	87/51	TL	19.50/2.5	1673	597	14500	6.5	10
26.5R25	★★★	209	L-5 / L-4	96/60	TL	22.00/3.0	1798	673	18500	6.5	10
29.5R25	★★★	216	L-5 / L-4	104/66	TL	25.00/3.5	1921	750	22400	6.5	10
29.5R29	★★★	218	L-5	104	TL	25.00/3.5	2023	750	23600	6.5	10
35/65R33	★★★	224	L-5	97	TL	28.00/3.5	2050	895	28000	6.5	10

Special cut resistance. Long tread life, Enhanced stability and riding comfort. Good traction for rough road. Suitable for stone pit, industry zone & underground mine.



## LCHS/LCHS+

Size	Star Rating	Load Index	TRA Code	Tread Depth (mm)	Type (TT/TL)	Standard Rim	Overall Dimension		Max. Load (kg)	Standard Pressure (bar)	Max. Speed (km/h)
							Diameter	Section Width			
26.5R25	★★★	209/193	L-4 / E-4	57	TL	22.00/3.0	1798	673	8500/11500	6.5/5.25	10/50
29.5R29	★★★	218/202	L-4 / E-4	60	TL	25.00/3.5	2023	750	23600/15000	6.5/5.25	10/50
35/65R33	★★★	224/207	L-4 / E-4	62.5	TL	28.00/3.5	2027	880	28000/17500	6.5/5.25	10/50
20.5R25	★★★	193	L-5	72	TL	17.00/2.0	1548	521	11500	6.5	10
23.5R25	★★★	201	L-5	78	TL	19.50/2.5	1673	597	14500	6.5	10
26.5R25	★★★	209	L-5	87	TL	22.00/3.0	1798	673	18500	6.5	10
29.5R25	★★★	216	L-5	95	TL	25.00/3.5	1921	750	22400	6.5	10
29.5R29	★★★	218	L-5	95	TL	25.00/3.5	2023	750	23600	6.5	10
35/65R33	★★★	224	L-5	97	TL	28.00/3.5	2075	880	28000	6.5	10

Good traction and protection. Long tread life, Enhanced stability and riding comfort. Good traction for rough road. Suitable for stone pit, industry zone & underground mine.



## LOFN

Size	Star Rating	TRA Code	Tread Depth (mm)	Type (TT/TL)	Standard Rim	Overall Dimension		Max. Speed (km/h)
						Diameter	Section Width	
13.00R25	★★★★	E-3	28	TT/TL	8.5	1300	330	50
14.00R24	★★★★	E-3	28	TT	10	1370	330	50
14.00R25	★★★★	E-3	28	TT/TL	10.00/2.0 10.00/1.5	1370	370	50

Specially designed for graders. Cutting resistance compound applied. Long tyre life. Outstanding self cleaning tread pattern with good traction. Radial structure providing anti shock & anti skidding.

# TIANLI



## FORESTRY

Size	Ply Rating	TRA Code	Tread Depth (mm)	Type (TT/TL)	Overall Dimension		Max. Speed (km/h)
					Diameter	Section Width	
23.1-26	16	LS-2	64	TT/TL	1630	587	4010
24.5-32	16	LS-2	60	TT/TL	1806	587	4860
28L-26	16	LS-2	57	TT/TL	1645	715	4250
30.5L-32	20	LS-2	67	TT/TL	1845	735	5400
35.5-32	20	LS-2	64	TT/TL	1935	880	7000

The ultimate forestry tyre with its super wear resistant & premium deep herringbone tread pattern for superb self cleaning and traction in all conditions. The tread & sidewalls are kevlar belt protected & designed to stand up to the toughest working conditions.



# NOBLE TYRE



## C2

Size	Ply Rating	TRA Code	Type (TT/TL)	Pressure 30km/h	Load 30km/h	Pressure 10km/h	Load 10km/h
23.1-26	16	C-2	TT/TL	170kpa	355kg	200kpa	5100kg

Diamond tread tyre. Designed for drive tyres on compaction rollers



## BIAS

10.00 X 20	18PR	G2	Excavator
10 x 16.5	10PR	G2	Skid Steer
12 x 16.5	12PR	G2	Skid Steer
14.00 x 24	12PR	G2	Grader
16.9 x 24	10PR		Grader
17.5 x 25	16PR	G2	Loader





With over 40 years in the industry, supplying quality products and service.

This is Porter Parts ongoing commitment to its clients.

Porter Parts have been a market leading supplier for OTR tyres in New Zealand for more than 20 years and with a comprehensive stock holding we can provide tyres for all applications and budgets.

All Hilo tyres come with a 3 year warranty\*.

Please don't hesitate to contact your local Porter Parts branch for all of your OTR requirements.

\*terms and conditions apply

**WHANGAREI** 3 Union East Street, Phone: 09 438 9171

**AUCKLAND** 9 Orb Avenue, Manukau City, Phone: 09 277 7640

**HAMILTON** 980 Te Rapa Road, Te Rapa, Phone: 07 849 1135

**ROTORUA** 15 Ferguson Place, Phone: 07 343 7154

**NEW PLYMOUTH** 112 Hurlstone Drive, Phone: 06 769 6417

**NAPIER** 25 Edmundson Street, Onekawa, Phone: 06 843 2148

**PALMERSTON NORTH** 30 Mihaere Drive, Phone: 06 355 4408

**GREYMOUTH** 47 Jacks Road, Phone: 03 768 7623

**CHRISTCHURCH** 16 McLeans Island Road, Phone: 03 359 9368

**DUNEDIN** 63 Main South Road, Burnside, Phone: 03 488 2964



**0800 650 600** [www.portergroup.co.nz](http://www.portergroup.co.nz)



[www.portergroup.co.nz](http://www.portergroup.co.nz)